


ZWICK
ARMATUREN GMBH 

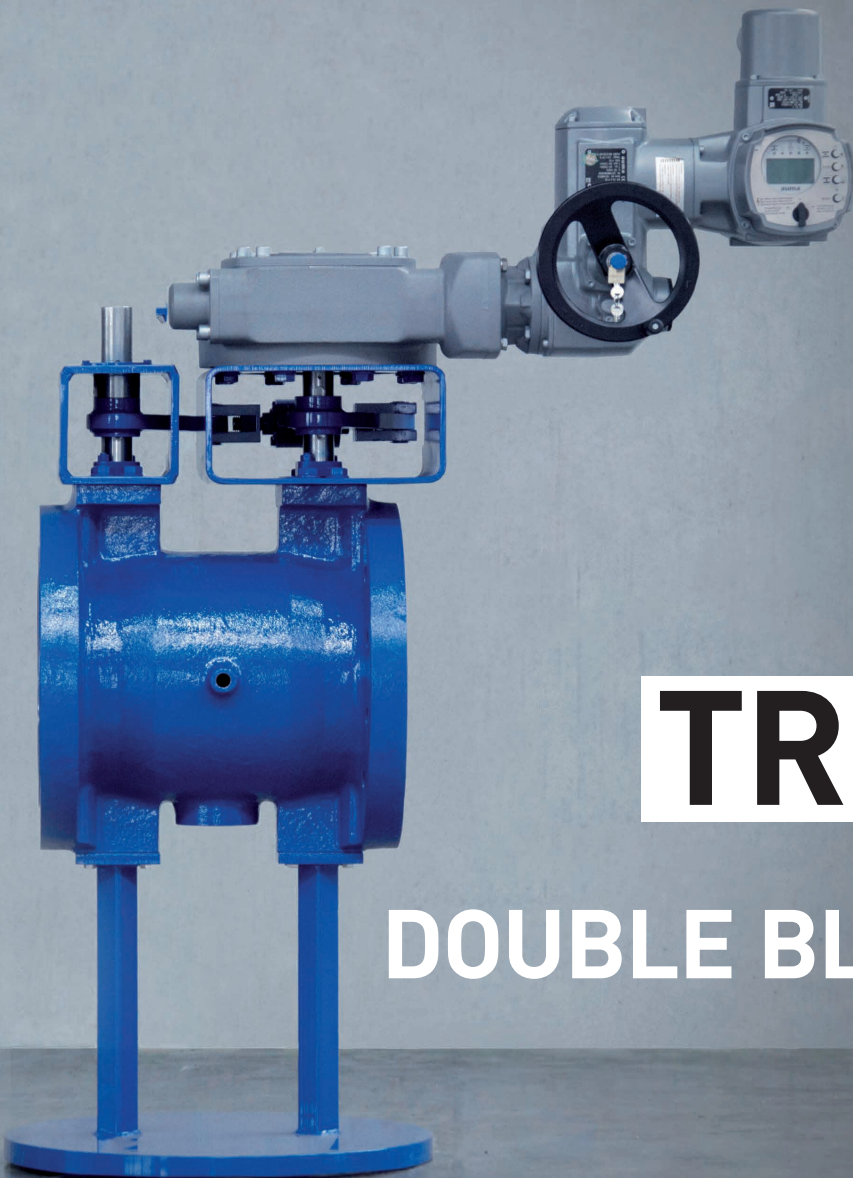

TRI-BLOCK


DOUBLE BLOCK & BLEED

100 % Zero Leakage

HIGH STANDARD VALVES FOR NON-STANDARD CONDITIONS.


TRI-BLOCK

- DN 80 - 1200 / 3" - 48"
- PN 10 - 63 / ANSI 150 - 600
- DIB and DBB configuration
- Metal seated
- Up to 2 Bleed ports integrated (individual)
- Zero leakage for liquids and gasses (API598, EN 12266 – 1 Cl. A or BS 6364)
- -50°C to +425°C (depending on material)
- Material: Steel, Stainless Steel and other alloys
- Face – Face dimension: EN 558-1 (to replace gate valves)

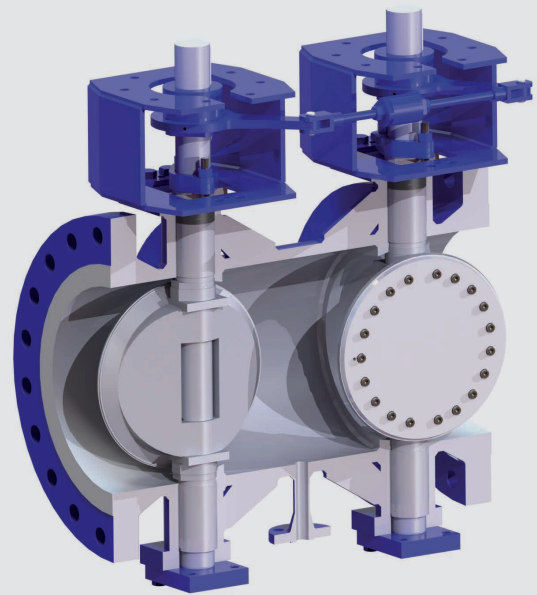

APPLICATIONS

- Storages
- Loading
- Protection by seal medium by Bleed port
- Replacement of redundant systems

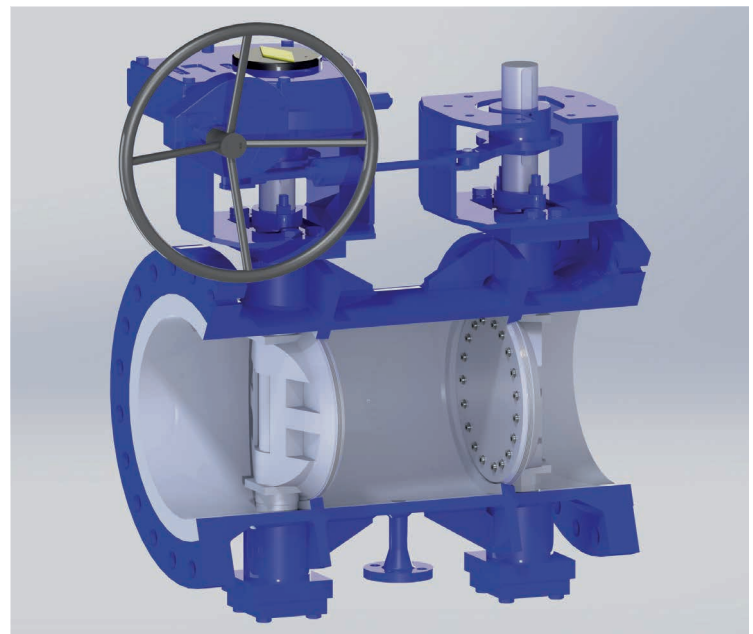

ZWICK
ARMATUREN GMBH

Egerstr. 1 & 25
D-58256 Ennepetal
TEL +49 (0) 23 33 / 98 56 5
FAX +49 (0) 23 33 / 98 56 6
MAIL info@zwick-gmbh.de

WWW.ZWICK-VALVES.COM