


**ZWICK**  
ARMATUREN GMBH 

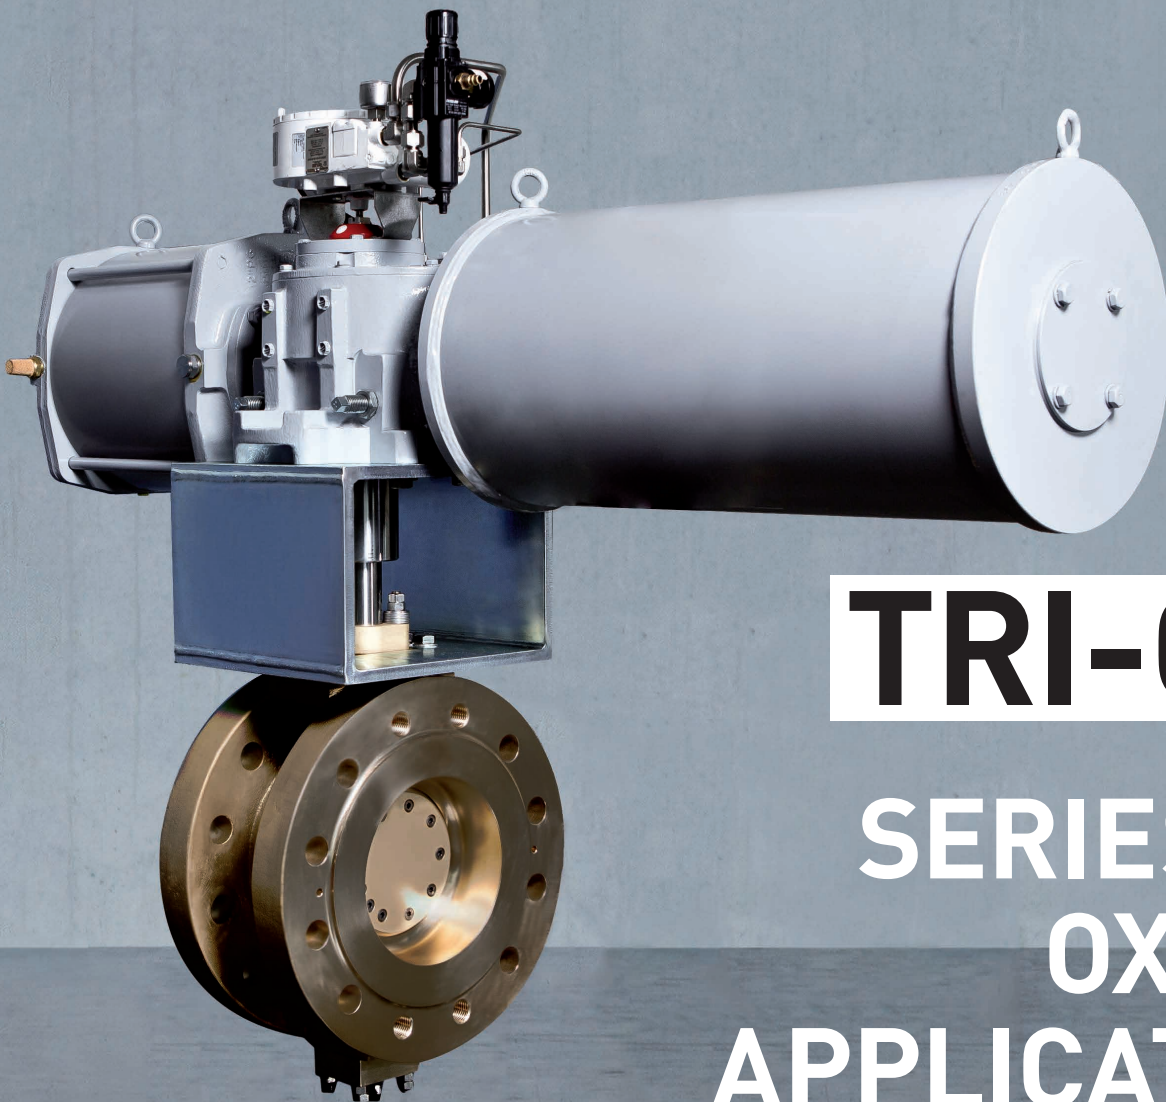


**TRI-CON**

**SERIES FOR  
OXYGEN  
APPLICATIONS**

# HIGH STANDARD VALVES FOR NON-STANDARD CONDITIONS.

- Bi-directional shut-off
- EIGA conform
- for control, isolation and ESD
- barrier or no barrier
- low Aluminum content
- high strength copper brass
- -50°C up to +250°C
- trim Monel / Inconel

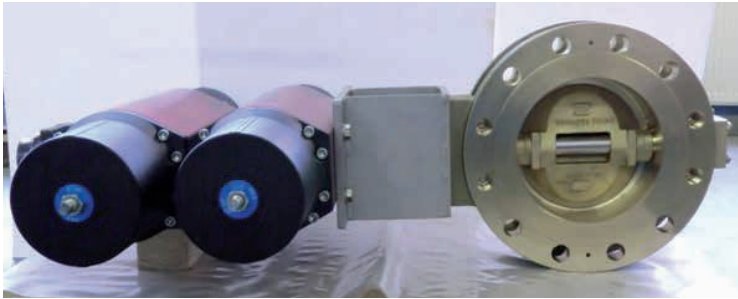


- optional SS Body with Inconel Seat
- optional full Monel version
- Zero Leakage
- cryogenic -196°C



## TRI-CON for O<sub>2</sub>

- DN 50 - 900 / 2" - 36"
- APN 10 - 250 / ANSI 150 - 900
- ZIM 1 & 3
- metal seated
- Zero Leakage
- Gas tight
- Fire Safe

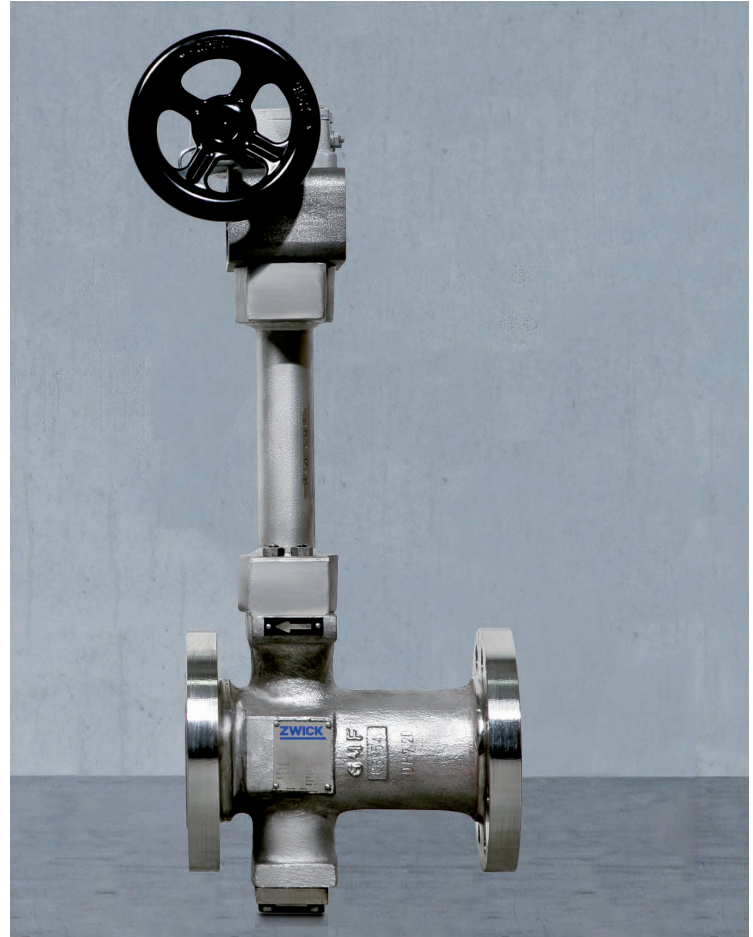

- O<sub>2</sub>-cleaned
- maintenance free
- TA Luft II
- BAM approved
- DEVT approved

**ZWICK**  
ARMATUREN GMBH

Egerstr. 1 & 25  
D-58256 Ennepetal  
TEL +49 (0) 23 33 / 98 56 5  
FAX +49 (0) 23 33 / 98 56 6  
MAIL [info@zwick-gmbh.de](mailto:info@zwick-gmbh.de)

[WWW.ZWICK-VALVES.COM](http://WWW.ZWICK-VALVES.COM)